



## **VIP-ACK-1000-V**

**OUTDOOR KEYPAD AND READER**



### **Features**

- Waterproof, conforms to IP66
- One relay, 1000 users
- Wiegand 26~37 bits input & output
- User data can be transferred by Wiegand line
- Access modes: Card, PIN, Card + PIN, Multi Cards/PINs
- Card type: 125KHz Hid & EM card, PIN length: 4~6 digits
- Pulse mode, toggle mode
- 2pcs device support interlock for two doors


# VIP-ACK-1000-V

## OUTDOOR KEYPAD AND READER




### Unique Features:

#### 1. Convertible working mode

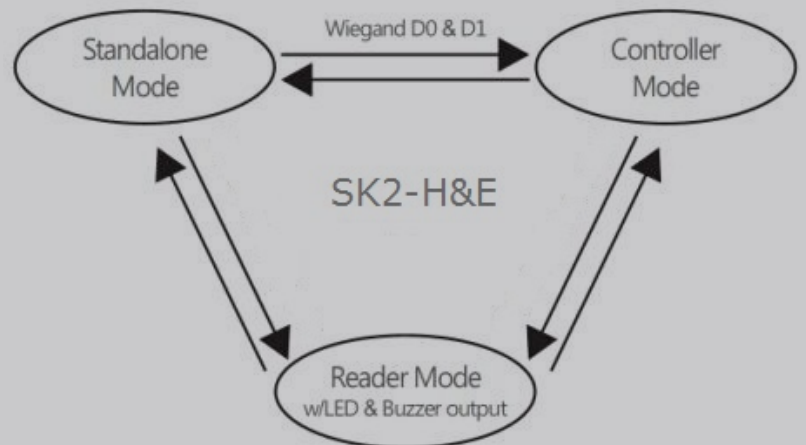

#### 2. User Data Transfer

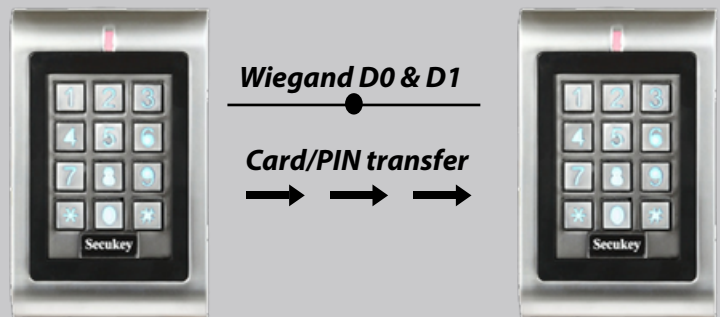

### Notes:

1. The master units and Accept Units must be SK2 or S-X series or Sboard.
2. Maximum 10 pcs Accept Units can be transferred once.
3. For full 1000 users enrolled, the transfer takes 3 minutes.

**VIP-ACK-1000-V**

OUTDOOR KEYPAD AND READER

[www.viperteksecurity.com](http://www.viperteksecurity.com)

# VIP-ACK-1000-V

## OUTDOOR KEYPAD AND READER



### Specifications

<b>User Capacity</b>	1000
Common User	998
Panic User	2
<b>Operating Voltage</b>	EM Card: 12~24V AC/DC HID Card: 12V AC/DC
Idle Current	< 35 mA
<b>Proximity Card Reader</b>	HID & EM
Radio Technology	125KHz Proximity Card
Read Range	2~6 cm
<b>Wiring Connections</b>	Relay output, exit button, alarm, door contact, Wiegand input, Wiegand output
<b>Relay</b>	One (NO, NC, Common)
Adjustable Relay Output time	1~99 Seconds (5 seconds default)
Lock Output Load	2 Amp Maximum
<b>Wiegand Interface</b>	Wiegand 26~37bits
Wiegand Input	26~37bits
Wiegand Output	26~37bits
PIN Output	4 bits, 8 bits(ASCII), 10 digits Virtual Number
<b>Environment</b>	Meets IP66
Operating Temperature	-40 oC ~ 60 oC (-40 oF ~ 140 oF)
Operating Humidity	0%RH ~ 98%RH
<b>Physical</b>	ABS Shell
Color	Black
Dimensions	12.2L x 5.0W x 2.1H (cm)
Unit Weight	165g

**VIP-ACK-1000-V**

OUTDOOR KEYPAD AND READER

[www.viperteksecurity.com](http://www.viperteksecurity.com)